






EI Type Clip-mounted Transformer

EI type iron power supply transformer, low loss at no load, high power output, high efficiency, low temperature rise, widely used in air-conditioner, acoustics, microwave, oven, amplifier, SPC exchange, UPS power supply, and the power supply meter, equipment of all kinds machine electronics, medical treatment, chemical industry, post and telecommunications, spinning, popular science.



Technical Specifications

Unit: mm

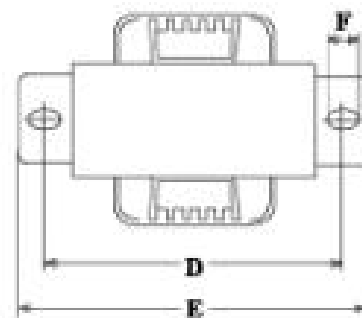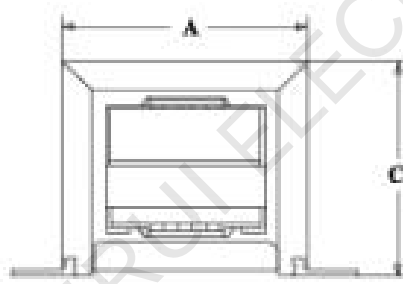

Type	Specifications	Power	A	B	C	D	E	F	Weight
EI 35	10×15	1.5VA	37	35	32	43~47	57	4	0.12kg
EI 35	10×18	2VA	37	38	32	43~47	55	4	0.14kg
EI 35	10×20	2.5VA	37	39	33	43~47	55	4	0.16kg
EI 41	13×15	2.5VA	43	34	35	53~56	67	4	0.16kg
EI 41	13×17	Conventional 3VA	43	37	35	52~54	65	4	0.18kg

This series of products offers a variety of parameter specifications tailored to customer requirements, so as to meet different application and installation needs.

Technical Specifications

Unit: mm

Type	Specifications	Power	A	B	C	D	E	F	Weight
EI 41	13×20	Conventional 5VA	43	40	35	53~55	65	4	0.22kg
EI 41	13×20 Vertical	5VA	35	40	44	44~48	55	4	0.22kg
EI 41	13×25	6VA	43	45	35	52~54	63	4	0.27kg
EI 48	16×20	8VA	50	41	43	60~64	73	4	0.32kg
EI 48	16×24	Conventional 10VA	50	46	43	60~64	76	4	0.38kg
EI 48	16x24 Vertical	10VA	43	45	51	52~56	67	4	0.38kg
EI 48	16x28	13VA	50	49	43	58~62	71	4	0.43kg
EI 48	16x28 Vertical	13VA	43	49	51	52~56	65	4	0.43kg
EI 48	16x30	15VA	50	51	43	60~64	76	4	0.47kg
EI 48	16x30 Vertical	15VA	43	51	51	54~58	68	4	0.47kg
EI 57	19x20	10VA	60	45	50	68~72	83	4	0.44kg
EI 57	19x25	Conventional 15VA	60	50	50	69~73	84	4	0.55kg
EI 57	19x25 Vertical	15VA	50	50	61	67~71	81	4	0.55kg
EI 57	19x30	Conventional 20VA	60	55	50	70~74	85	4	0.65kg
EI 57	19x30 Vertical	20VA	50	54	61	66~70	81	4	0.65kg
EI 57	19x35	25VA	60	60	50	69~73	85	4	0.75kg
EI 66	22x28	Conventional 25VA	69	56	59	78~82	94	4	0.81kg
EI 66	22x28 Vertical	25VA	59	56	70	69~73	83	4	0.81kg
EI 66	22x33	Conventional 30VA	69	63	59	80~84	95	4	0.93kg

Technical Specifications

Unit: mm

Type	Specifications	Power	A	B	C	D	E	F	Weight
EI 66	22x35	35VA	69	65	59	78~82	94	4	0.99kg
EI 66	22x38	Conventional 40VA	69	68	59	79~83	94	4	1.1kg
EI 66	22x38 Vertical	40VA	59	68	70	67~71	83	4	1.1kg
EI 76	26x35	Conventional 50VA	78	63	68	90~94	104	4	1.3kg
EI 76	26x40	70VA	78	68	68	88~92 Three Holes	104	4	1.5kg
EI 76	26x45	Conventional 80VA	78	75	69	88~92 Three Holes	103	4	1.7kg
EI 86	28x40	80VA	88	78	77	Bracket 70x62	/	4	1.8kg
EI 86	28x45	Conventional 100VA	87	83	77	Bracket 70x67	/	4	2.0kg
EI 86	28x50	120VA	87	88	77	Bracket 70x72	/	4	2.2kg
EI 96	32x40	100VA	97	82	88	Bracket 80x65	/	5	2.3kg
EI 96	32x45	130VA	97	87	88	Bracket 80x70	/	5	2.6kg
EI 96	32x50	150VA	97	92	88	Bracket 80x75	/	5	2.9kg
EI 96	32x55	200VA	97	97	88	Bracket 80x80	/	5	3.1kg
EI 96	32x60	250VA	97	102	88	Bracket 80x85	/	5	3.4kg
EI 96	32x65	300VA	97	107	88	Bracket 80x90	/	5	3.7kg